



PROXSECURE UHF LABELS PVT. LTD.



# PID-Metal Hang Tag

PID-Metal hang tag is an ideal tag for the applications where the tag can not be stuck directly on the asset surface. It is used for asset tracking and RTI applications. Tags come with durable polyester material and a large area for visual information printing.



Its special feature is that a metal flag can be created at the end of the tag with a final tag size of 60 x 105 mm after folding..

## Applications



Asset Tracking





Retail Applications



Warehouse Management

## Ordering Information

Part Number	Item Details
RFST-050303-ETSI/FCC	Hang Tag with R6P IC



## Electrical Specifications

Operational Frequency	FCC: 902-928MHz ETSI: 865- 868 MHz
Interface Protocol	ISO 18000-63 and EPCglobal Gen2v2
Chip Type*	IMPINJ MONZA R6P
Memory Configuration	EPC Memory – 96 bits /128 bits USER Memory – 64 bits / 32 bits
Date Retention	50 Years
Write Cycle Endurance	100,000 cycles
Read Range**	Upto 14 meter


## Product Characteristics

Die Cut Size	105 x 101 mm / 4.13 x 3.97 inch
Yield	100 %
Material	PET/Aluminum Foil
Packaging	Reel core inner dimension: 76.2mm/ 3" , 500pcs/roll
Attachment	Hanging / Cabel tie

## Environmental Specifications

Operating Temperature	-40 to +85 °C
Storage Temperature	-40 to +85 °C
IP Rating	IP67


## Product Drawing:

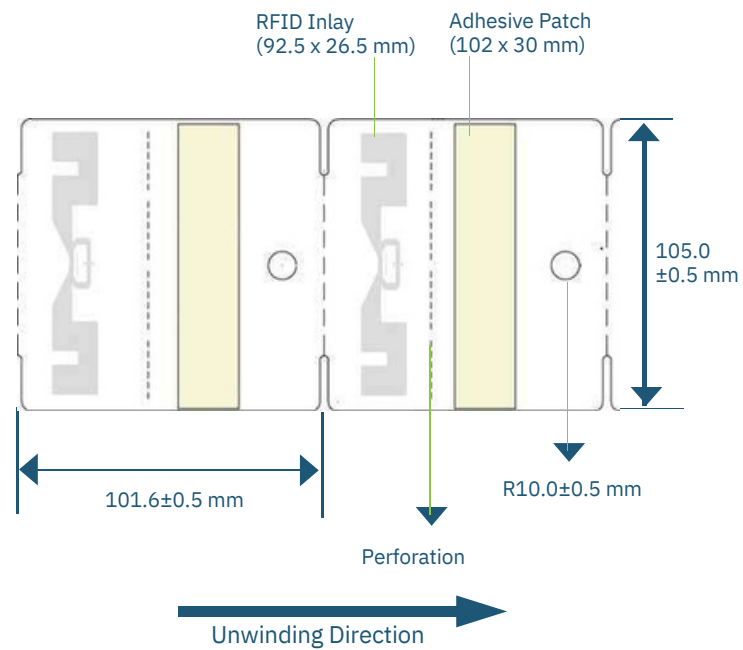

## Personalization

- Customer specific encoding of EPC
- Customised printing of logo, text, barcode etc

## Read Range Graph

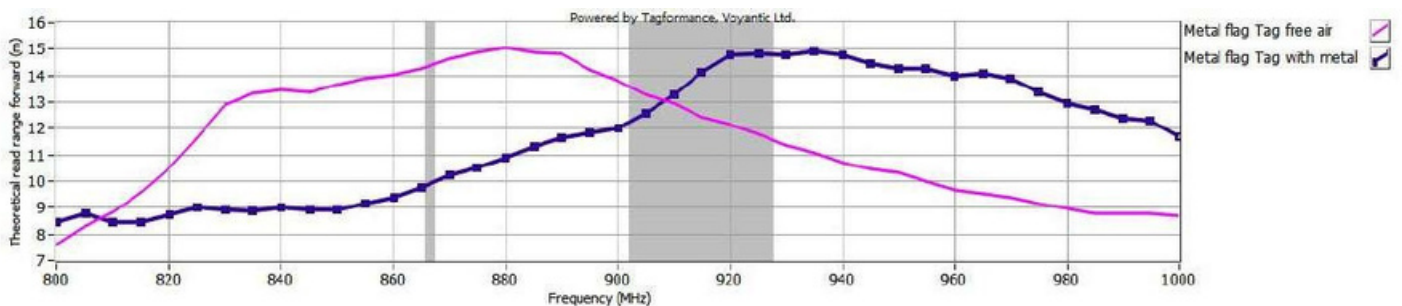

\*\* The indicated read range values are measured in our laboratory testing environment, where antennas with optimum directivity are used with maximum allowed operating power. Different surface materials and environments may exhibit different results.